

TITGEMEYER^{GTO}

YOUR SOLUTION

■ **POP[®] PB 2500** battery-operated blind rivet tool



TITGEMEYER Td1541GB(0313)1



**GOOD DESIGN
AWARD 2012**

POP® PB 2500 battery-operated blind rivet tool

Professional-grade blind rivet tool technology

Titgemeyer's POP PB 2500 is one of the top professional, battery-operated blind rivet installation tools on the international market. Powerful, fast and light but equally sturdy and comfortable to use. This powerhouse of a tool runs on the latest generation in rapid-charging 18 volt li-ion batteries. The POP PB 2500 will impress with its outstanding design and extensive equipment.

In a nutshell: The POP® PB 2500 powerhouse

- Exceptionally high installation speed
- Strong 18V lithium ion battery for top performance (DeWalt compatible)
- Extremely long battery life per charge:
Up to 900 installation processes (4.8 mm) per battery charge
- Super-fast charging in 30 minutes (standard battery)
- Suitable for \varnothing 3.0 mm to 4.8 mm blind rivets
- 25 mm stroke for numerous applications
- Ultra-light at just 1.69 kilos
- Sturdy, roomy storage case

Specifications:

Range of application: blind rivets up to \varnothing 4.8 mm

Technical specifications

Length:	320 mm
Width:	75 mm
Height:	240 mm
Installation force:	8.5 kN
Motor:	High-performance brushless motor
Weight:	1.69 kg
Battery:	18 V lithium ion 1.5 Ah
Charging time:	30 minutes (standard battery)
Charger:	20 V with LED charge status
Certification:	CE Mark
Operating instructions:	CD in 23 languages

Scope of delivery

POP PB 2500 battery-operated blind rivet tool

1 battery

1 charger

Nose pieces: 3.0 – 4.8 / 5.0 mm, standard


Operating instructions

Carrying case

Part No. 329 500 000

Nose pieces

Nose piece no.	4	5	6
Rivet shaft \varnothing mm	3.0 / 3.2	4.0	4.8 / 5.0

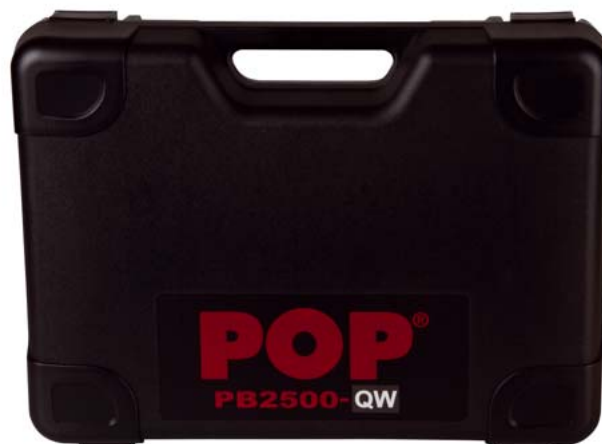

POP® PB 2500 battery-operated blind rivet tool

Professional installation tool

Made for trade and industry professionals, the POP PB 2500 is an exceptionally cost efficient device for daily use. The battery installation tool is exceptionally easy to operate: installing blind rivets has just become faster, easier and, above all, safer, with no hydraulic hoses or batteries that run down too quickly.



Specifications

Blind rivet types	Material				
	Al/St	Al/Va	Al/Al	St/St	Va/Va
Standard POP® (TIFAS®) rivets up to ø 4.8 / 5.0 mm	•	•	•	•	•
TIFAS® Multigrip up to ø 4.8 mm	•	•	•	•	–
TIFAS® Power-Grip blind rivets up to ø 4.8 mm	•	–	–	•	–
TIBULB® blind rivets up to ø 4.8 mm	–	–	•	•	–



Gebr. TITGEMEYER GmbH & Co. KG

Hannoversche Strasse 97

(Navigation: Hettlicher Masch 2)

49084 Osnabrück, Germany

P.O. Box 43 20

49033 Osnabrück, Germany

Phone: +49 (0)5 41/58 22-0

Fax: +49 (0)5 41/58 22-491

email: fasteners@titgemeyer.com

www.titgemeyer.com